EM-500 Series

Indoor Color Micro Metal Case Camera

550 TVL | COLOR | Indoor | POWER 12VDC

Features

- Super High Resolution of 550 TVL
- Choice of 3.7mm Conical Pinhole Lens, 3.7mm Flat Pinhole Lens, 4.3mm Super Cone Pinhole Lens
- Mounting bracket allows wide range of mounting flexibility
- Mini Metal Case for covert use or very discreet surveillance

Specifications

Part Number	EM-500 Series
Pickup Device	1/3" Sony ICX638 CCD
Video Format	NTSC or PAL
Picture Elements	768 x 494 (NTSC) I 768 x 494 (NTSC)
Effective Pixels (NTSC I PAL)	813 (H) x 508 (V) 410K I
Scanning System	2:1 Interlace
Scanning Frequency	H: 15.734 KHz, V: 59.94 Hz I
Horizontal Resolution	550 TVL
Sensitivity	0.2 Lux / F=2.0 (30 IRE)
S/N Ratio	Over 48dB (AGC off)
Electronic Shutter	1/60s~1/100,000s
Video Output	BNC 1.0Vp-p 75Ω
Gamma Correction	0.45
Lens Type	3.7mm Pinhole Lens
Lens Options	Conical Pinhole Lens
BLC	Auto
Gain Control	Auto
Sync Mode	Internal Sync
Environmental	Indoor Applications
Power Source	12VDC
Power Consumption	3.5W max
Operating Temp	14°F~113°F I -10°C~45°C
Dimensions (in I mm)	1" W x 1" H I 25 x 25mm
Weight (lbs I gm)	0.07lbs I 32g
Certifications	CE/FCC

Dimensions: mm/in

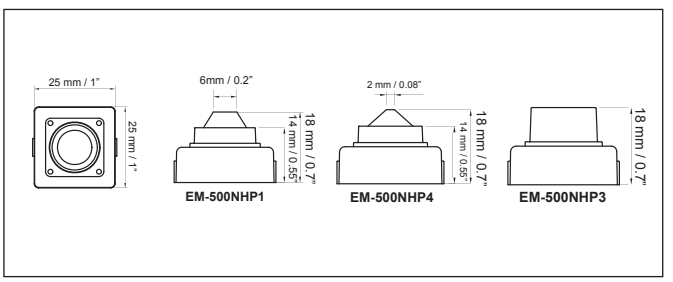

Ordering Info

EM-500HP1: Color Micro Metal Camera, 550 TVL, 3.7mm Conical Pinhole
EM-500HP3: Color Micro Metal Camera, 550 TVL, 3.7mm Flat Pinhole
EM-500HP3: Color Micro Metal Camera, 550 TVL, 4.3mm Super Cone Pinhole

*2012 EverFocus Product Catalog Vs 1.1 - Models vary in different countries. Visit **www.everfocus.com** and select your country for additional ordering and specification information. EverFocus is not responsible for typographical errors. Product specifications are subject to change without notice.*